

Spring 2020

控制系統
Control Systems

Unit 56
Extensions of the Root-Locus Method

Feng-Li Lian & Ming-Li Chiang

NTU-EE

Mar 2020 – Jul 2020

- For **negative** values of **parameters**
- Has a **zero** in the **RHP** (non-minimum phase)

$$\Rightarrow 1 + A (z_i - s) G'(s) = 0$$

$$\Rightarrow 1 + (-A) (s - z_i) G'(s) = 0$$

$$\Rightarrow 1 + K (s - z_i) G'(s) = 0$$

$$\Rightarrow K = -A \leq 0$$

- For **negative locus**, the **phase condition** is:
 - The **angle of $L(s)$** is $0^\circ + 360^\circ (l-1)$ for s on the negative locus
 - Hence, a **Negative Locus** is referred as a **0° Root Locus**

- Rule 1: (as before)
- The n branches of the locus leave the poles of $L(s)$ and
- m of these branches approach the zeros of $L(s)$ and
- $n - m$ branches approach the asymptotes.
- Rule 2: (odd \rightarrow even)
- The locus is on the real axis to the left of an even number of real poles and zeros.
- Rule 3: ($180^\circ \rightarrow 0^\circ$)
- The asymptotes are described by:

$$\phi_l = \frac{0^\circ + 360^\circ (l - 1)}{n - m} \quad l = 1, 2, \dots, n - m$$

$$\alpha = \frac{\sum p_i - \sum z_i}{n - m} = \frac{-a_1 + b_1}{n - m}$$

- Rule 4: ($180^\circ \rightarrow 0^\circ$)

- The **angle of departure** of a branch of the locus from **repeated poles** with **multiplicity q** is given by

$$q \phi_{l,dep} = \sum \psi_i - \sum_{i \neq l, dep} \phi_i - 0^\circ - 360^\circ(l-1)$$

$l = 1, 2, \dots, q$

- The **angle of arrival** of a branch **at a zero** with **multiplicity q** is given by

$$q \psi_{l,arr} = \sum \phi_i - \sum_{i \neq l, arr} \psi_i + 0^\circ + 360^\circ(l-1)$$

- Rule 5:

- The locus can have **multiple roots** at points on the locus and the branches will approach a point of **q roots** at angles separated by

$$\frac{180^\circ - 360^\circ(l-1)}{q}$$


- And will depart at angles with same separation.

Example 5.13: Negative Root Locus for Airplane

$$G(s) = \frac{6 - s}{s(s^2 + 4s + 13)}$$

$$= - \frac{s - 6}{s(s^2 + 4s + 13)}$$

$$\Rightarrow 1 + K \frac{s - 6}{s(s^2 + 4s + 13)} = 0$$

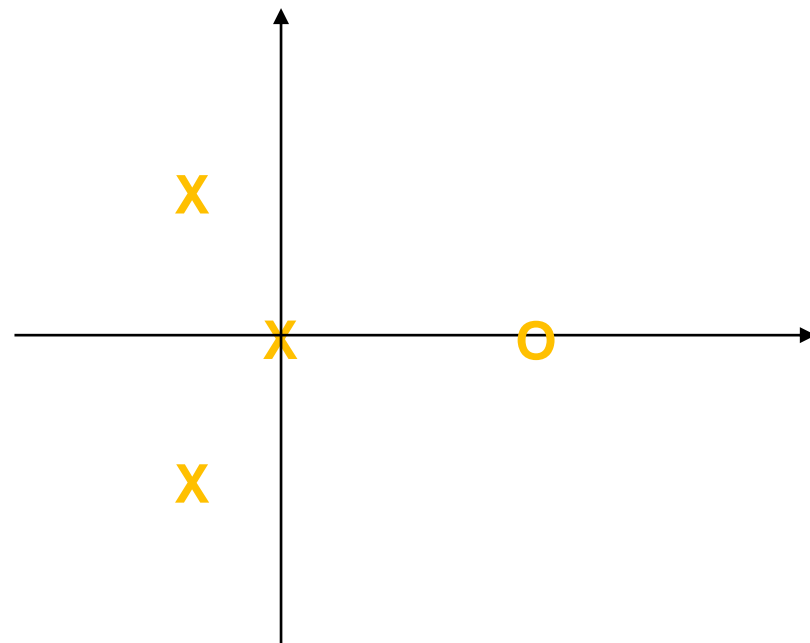

● Rule 1:

● There are 3 branches and 2 asymptotes.

● Rule 2:

● One real-axis segment to the right of $s = 6$ and

● A segment is to the left of $s = 0$.

Example 5.13: Negative Root Locus for Airplane

Rule 3:

- The angles of asymptotes


$$\phi_l = \frac{360^\circ(l-1)}{3-1} = 0^\circ, 180^\circ$$

$$\alpha = \frac{-2 - 2 - (6)}{3 - 1} = -5$$


Rule 4:

- Departs at $s = -2+j3$ at

$$\begin{aligned} \phi &= \tan^{-1}\left(\frac{3}{-8}\right) - \tan^{-1}\left(\frac{3}{-2}\right) - 90^\circ + 360^\circ(l-1) \\ &= 159.4^\circ - 123.7^\circ - 90^\circ + 360^\circ(l-1) \\ &= -54.3^\circ \end{aligned}$$

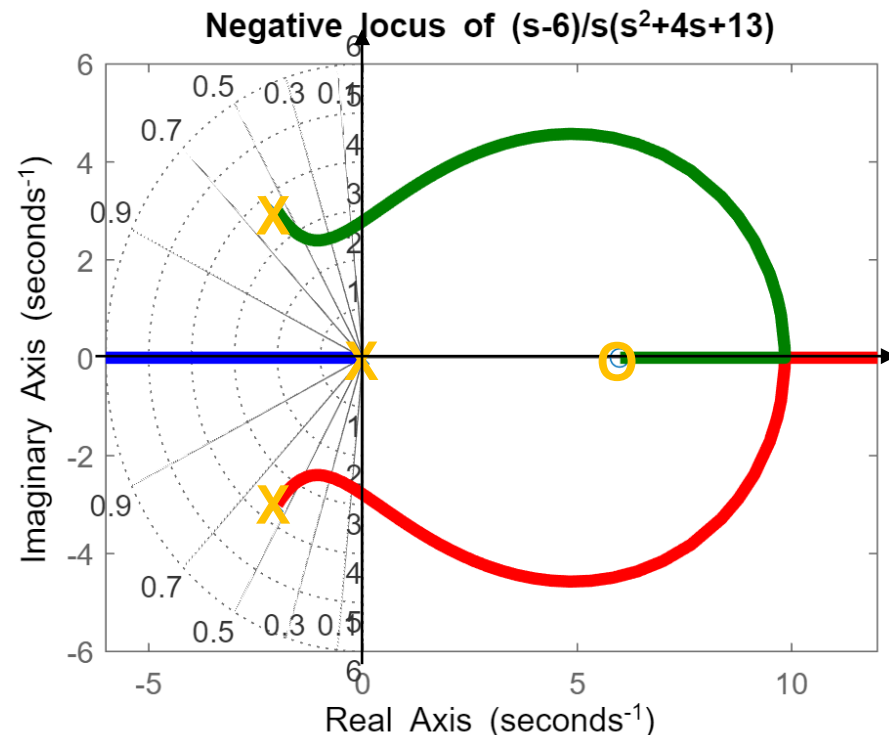

Example 5.14: Root Locus Using 2 Parameters in Succession

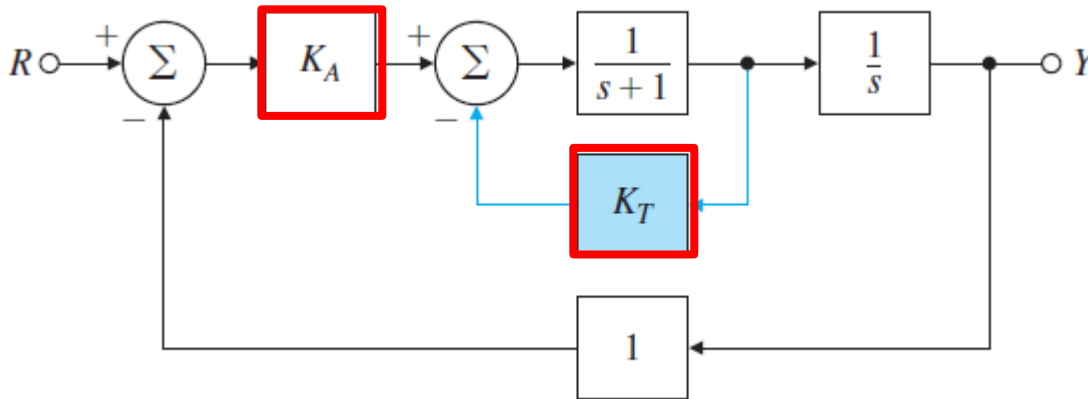

$$\Rightarrow 1 + \frac{K_A}{s(s+1)} + \frac{K_T}{(s+1)} = 0$$


$$\Rightarrow s^2 + s + K_A + K_T s = 0$$

$$\Rightarrow \text{with } K_A = 4$$

$$\Rightarrow 1 + K_T \frac{s}{s^2 + s + 4} = 0$$

$$\Rightarrow 1 + K L(s) = 0$$

Root Locus vs. K_T ($K_A=1$)

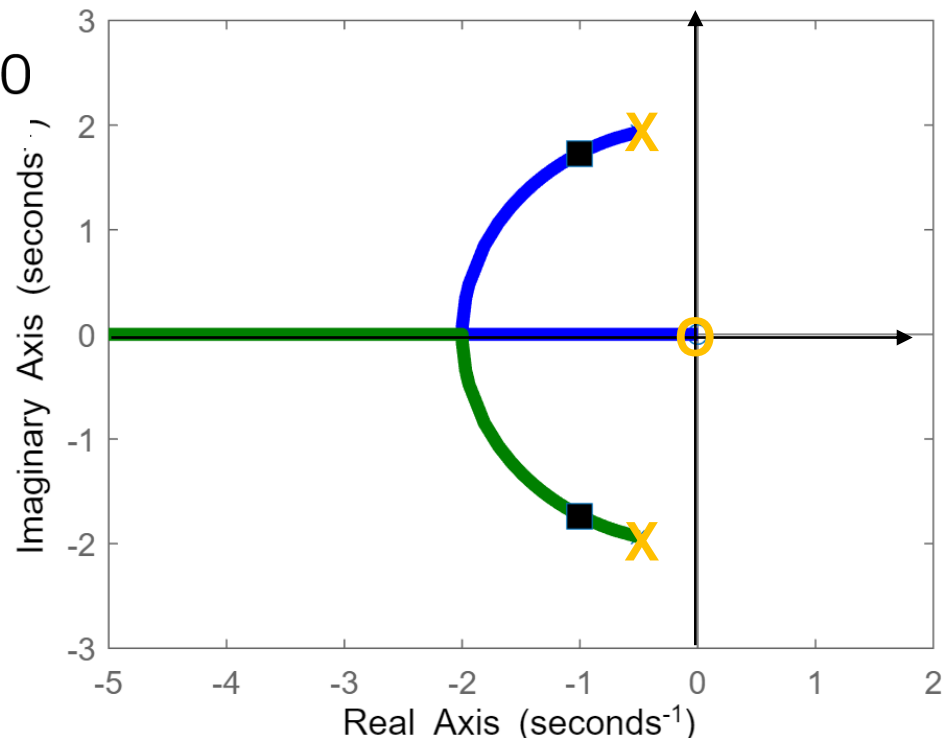

Example 5.14: Root Locus Using 2 Parameters in Succession


$$\Rightarrow K_T = 1$$

$$\Rightarrow K_A = 4 + K_1$$

$$\Rightarrow 1 + K_1 \frac{1}{s^2 + 2s + 4} = 0$$

$$\Rightarrow 1 + K_T \frac{s}{s^2 + s + 4} = 0$$

Root Locus vs. K_1 ($K_A=K_1+4$)

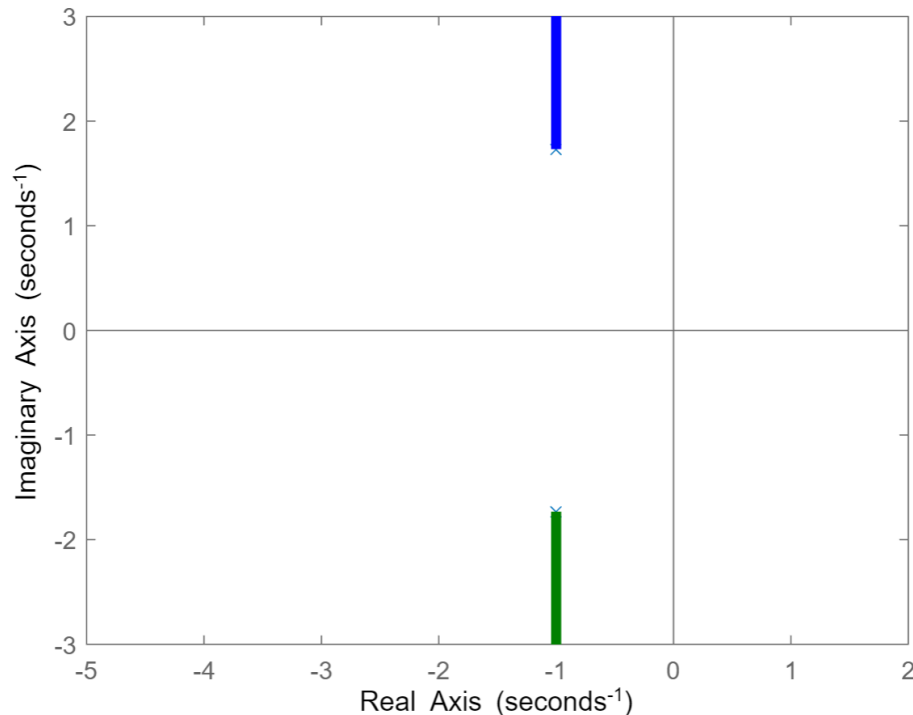

Root Locus vs. K_1 ($K_A=K_1+4$)

