

Spring 2020

控制系統
Control Systems



Unit 6F
Stability Margins

Feng-Li Lian & Ming-Li Chiang

NTU-EE


Mar 2020 – Jul 2020

■ In U6D

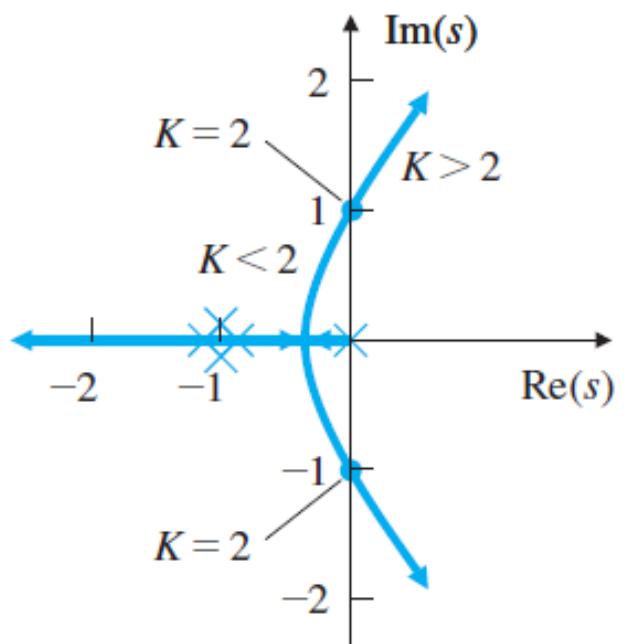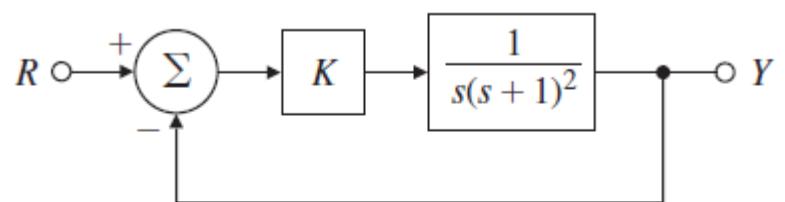

$$(b) \quad |K G(j\omega)| < 1$$

$$\angle G(j\omega) = -180^\circ$$

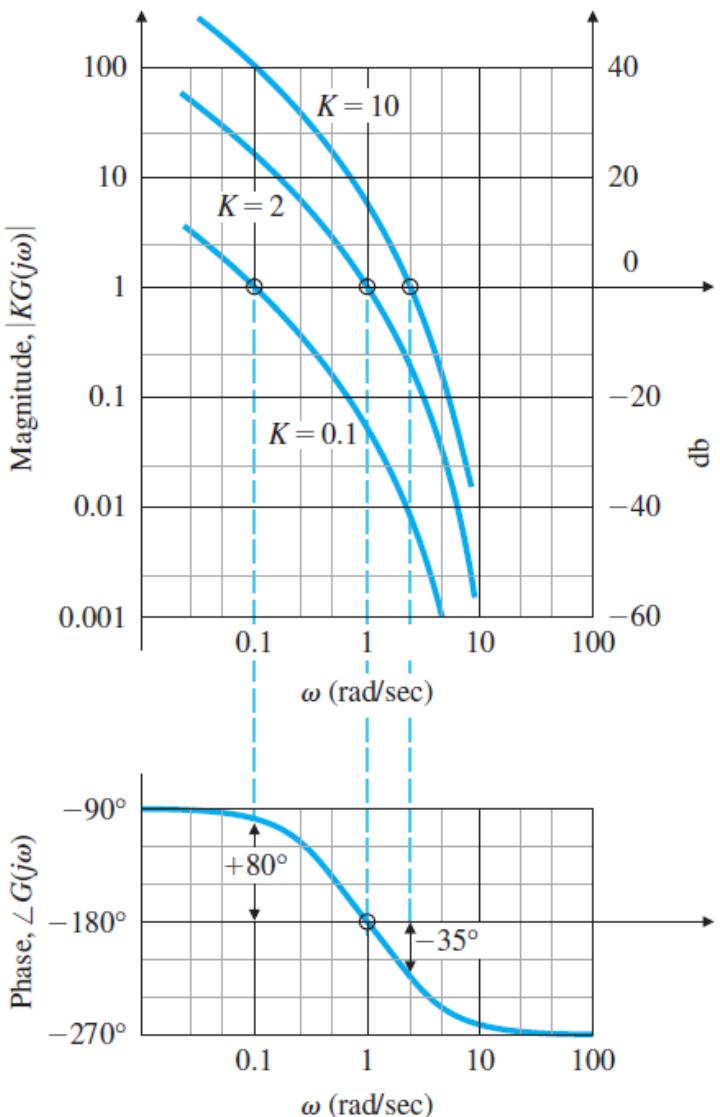

- Gain Margin (GM) & Phase Margin (PM)
- Another measure of stability,
originally defined by Smith (1958)
- Combine the two margins into
Vector Margin / Complex Margin


$$\angle G(jw) = -180^\circ$$

$$|KG(jw)| = 1$$


$$\Rightarrow K=2 \quad |KG(jw)| = 1 \quad \text{GM} = 1$$

$$\Rightarrow K=0.1 \quad |KG(jw)| = 0.05 \quad \text{GM} = 20$$

$$\Rightarrow K=10 \quad |KG(jw)| = 5 \quad \text{GM} = 0.2$$

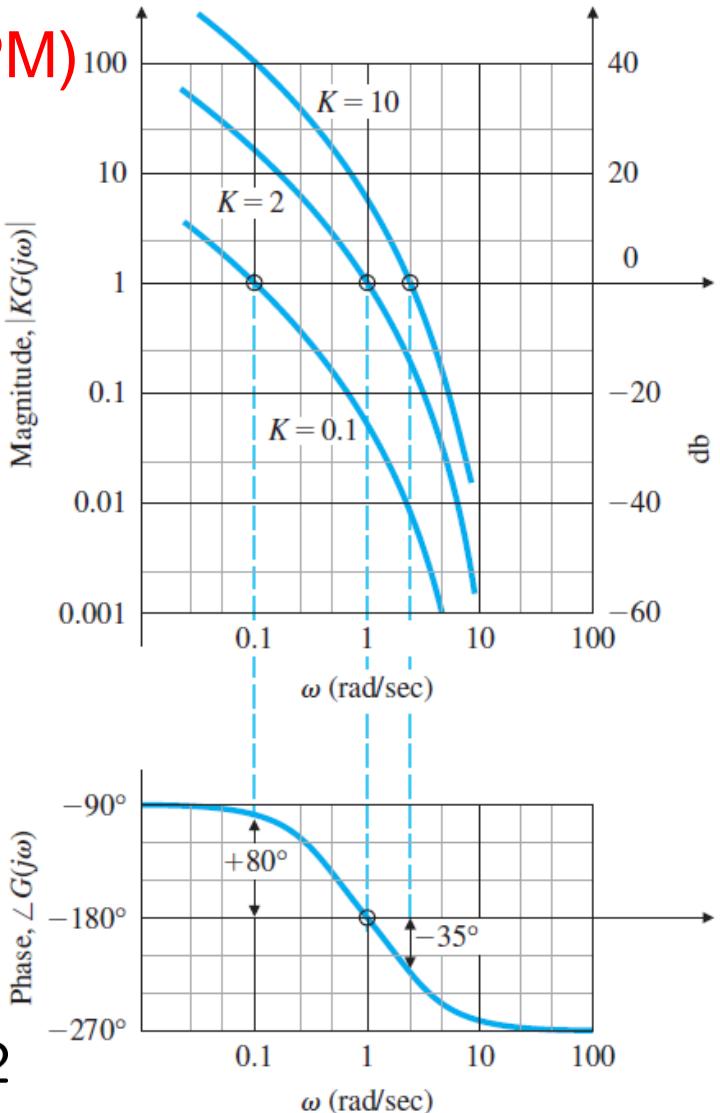

▪ Unstable

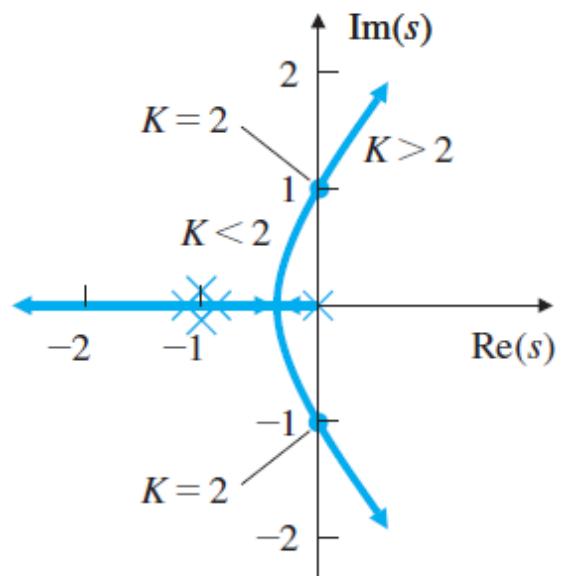

$$\angle G(jw) = -180^\circ$$



$$|K G(jw)| = 1 \quad \text{(b)}$$

$$\Rightarrow K=2 \quad |K G(jw)| = 1 \quad \text{GM} = 1$$

$$\Rightarrow K=0.1 \quad |K G(jw)| = 0.05 \quad \text{GM} = 20$$

$$\Rightarrow K=10 \quad |K G(jw)| = 5 \quad \text{GM} = 0.2$$

$$\mathcal{T}(s) = \frac{Y(s)}{R(s)} = \frac{K G(s)}{1 + K G(s)}$$

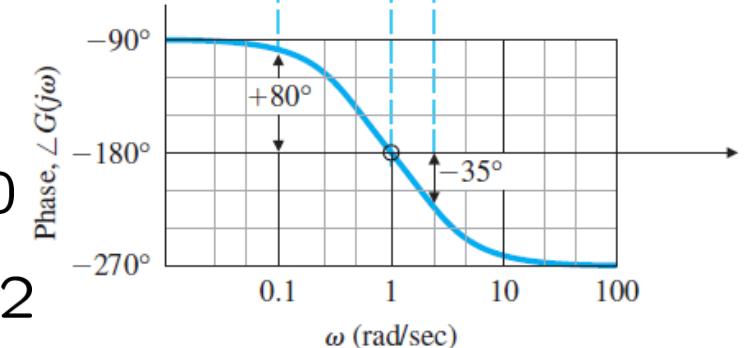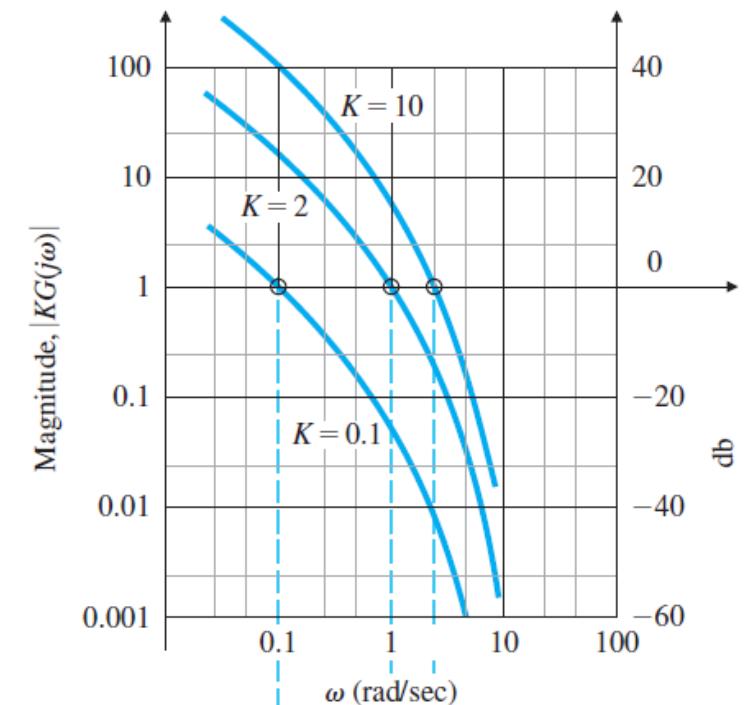

■ Unstable

- Gain Margin (GM) & Phase Margin (PM)

$$|K G(j\omega)| = 1$$


$$\Rightarrow \angle G(j\omega) = ? \quad \blacksquare \text{ Exceeds } -180^\circ$$

$$\Rightarrow K=2 \quad |KG(j\omega)| = 1 \quad \text{PM} = 0^\circ$$

$$\Rightarrow K=0.1 \quad |KG(j\omega)| = 1 \quad \text{PM} = +80^\circ$$

$$\Rightarrow K=10 \quad |KG(j\omega)| = 1 \quad \text{PM} = -35^\circ$$

■ Unstable

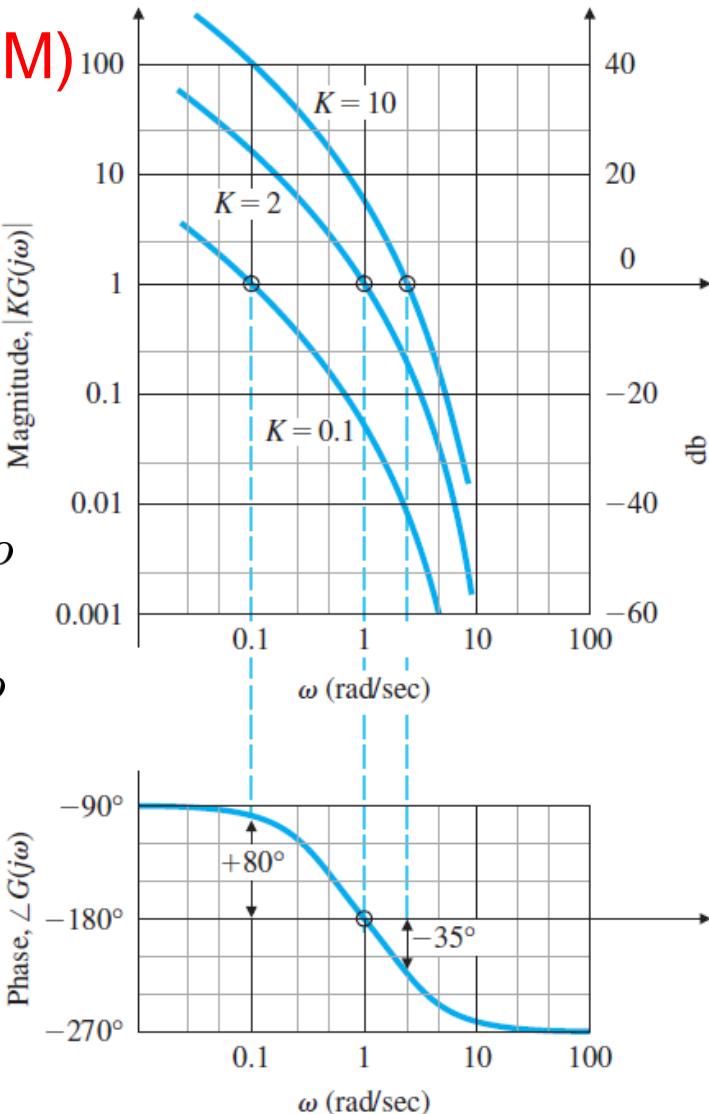

■ Gain Margin (GM) & Phase Margin (PM)

$$\Rightarrow K = 0.1 |KG(j\omega)| = 0.05 \quad GM = 20$$

$$|KG(j\omega)| = 1 \quad PM = +80^\circ$$


$$\Rightarrow K = 2 \quad |KG(j\omega)| = 1 \quad GM = 1$$

$$|KG(j\omega)| = 1 \quad PM = 0^\circ$$

$$\Rightarrow K = 10 \quad |KG(j\omega)| = 5 \quad GM = 0.2$$

$$|KG(j\omega)| = 1 \quad PM = -35^\circ$$

■ Nyquist Plot


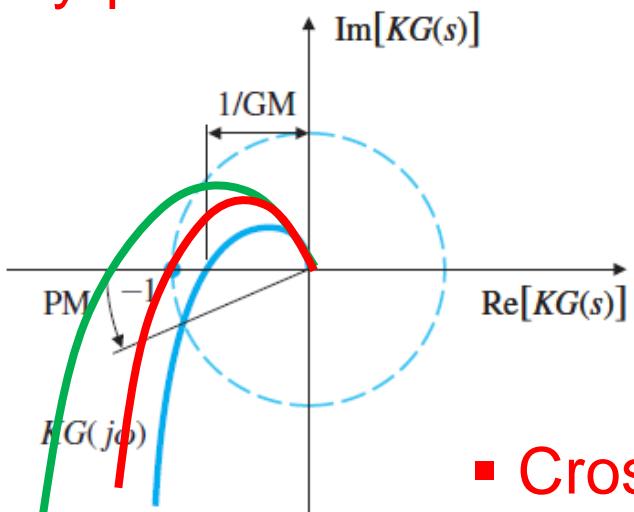


$$K = 0.1$$

$$K = 2$$


$$K = 10$$

■ Crossover Frequency, ω_c

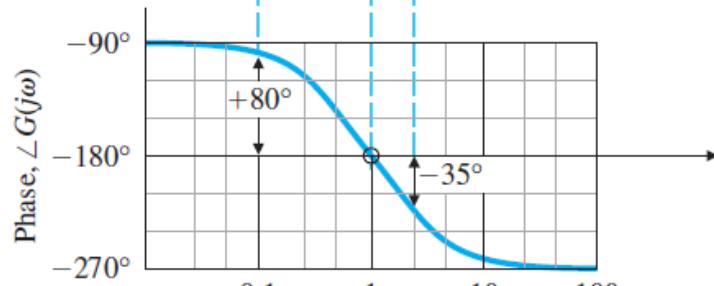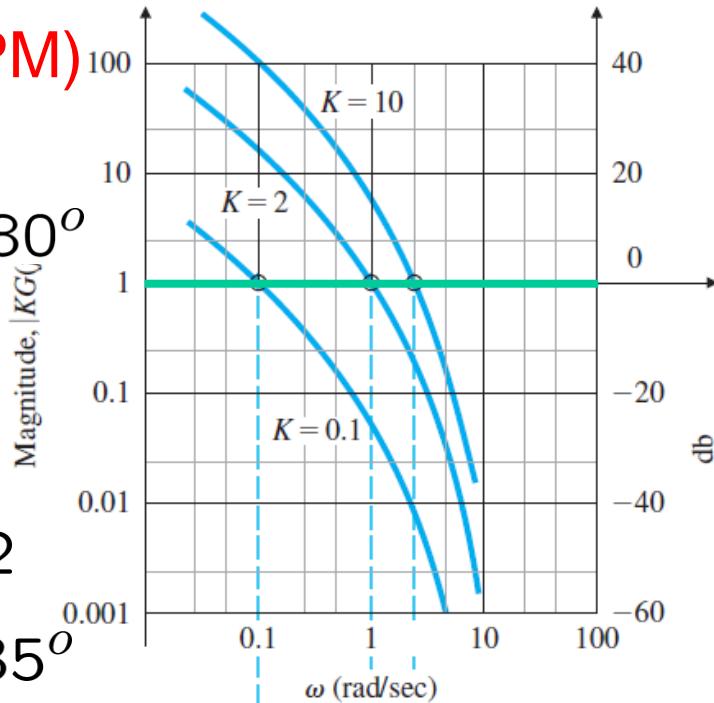


$$|KG(j\omega)| = 1 \quad \text{OR} \quad 0 \text{ db}$$

In Example 6.9:


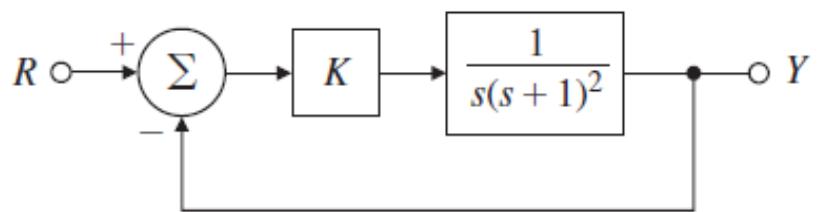


$$GM = 2$$



Nyquist Plot

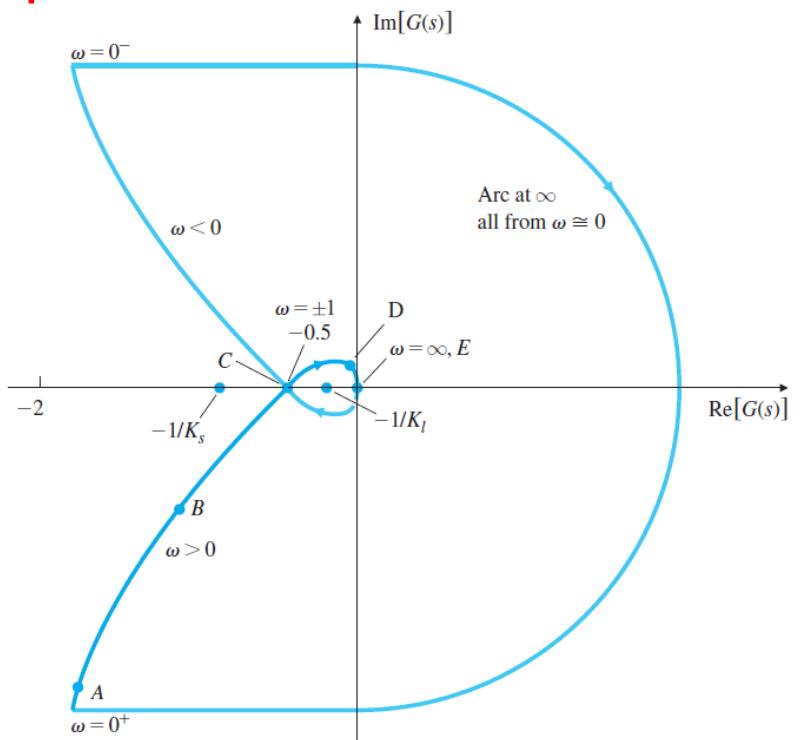

$$PM = +22^\circ$$

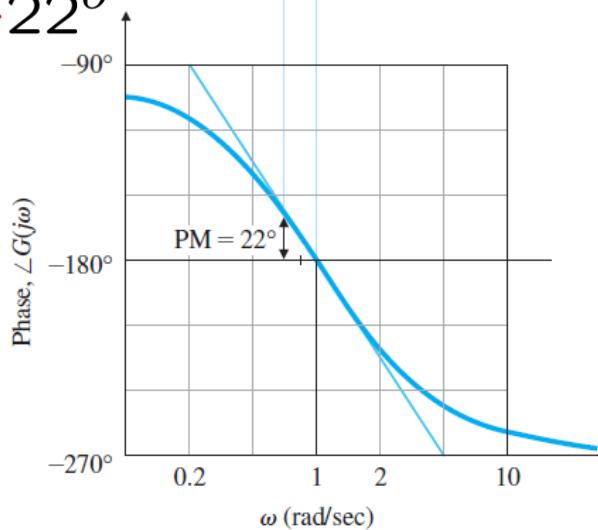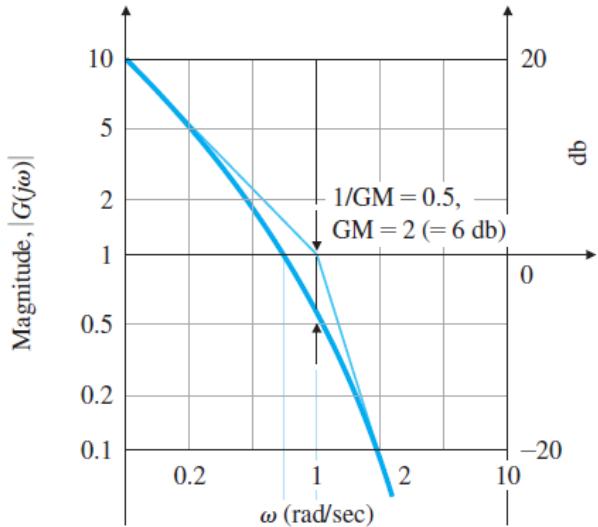

- PM vs K
- K = 5
- $|KG(j\omega)| = 1$
- $PM = -22^\circ$
- K = 0.5
- $|KG(j\omega)| = 1$
- $PM = +45^\circ$
- K = 0.2
- $|KG(j\omega)| = 1$
- $PM = +70^\circ$

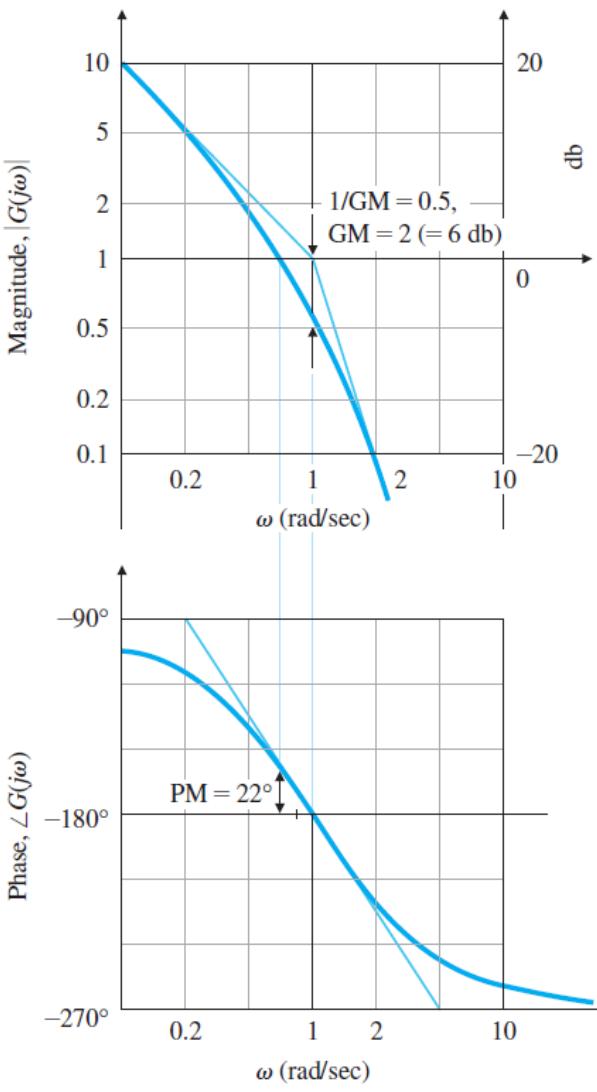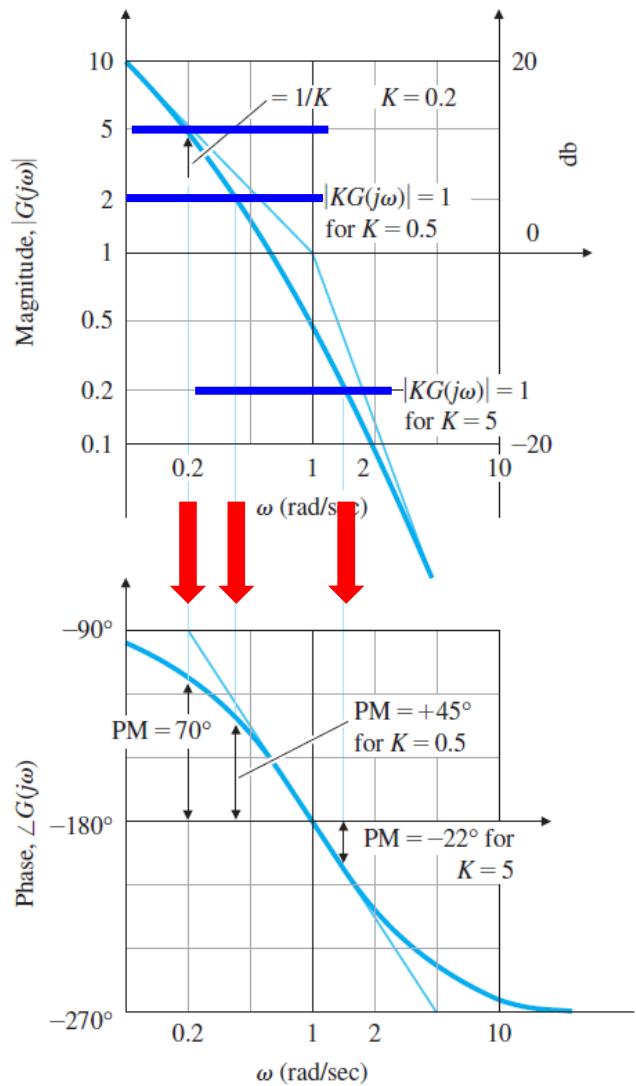


- The PM is more commonly used to specify control system performance because it is more closely to the damping ratio of the system.

- For the open-loop 2nd-order system: $G(s) = \frac{w_n^2}{s(s + 2\zeta w_n)}$
- With unity feedback, produces the closed-loop system:

$$\mathcal{T}(s) = \frac{w_n^2}{s^2 + 2\zeta w_n s + w_n^2}$$





- The relationship between the PM and ζ is:

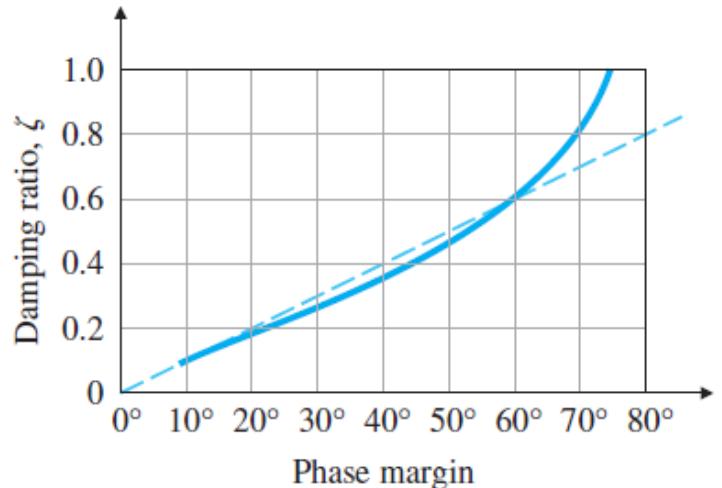

$$PM = \tan^{-1} \left[\frac{2\zeta}{\sqrt{\sqrt{1+4\zeta^4} - 2\zeta^2}} \right]$$



$$\zeta \approx \frac{PM}{100} \quad \text{for } PM < 60^\circ$$

Stability Margins

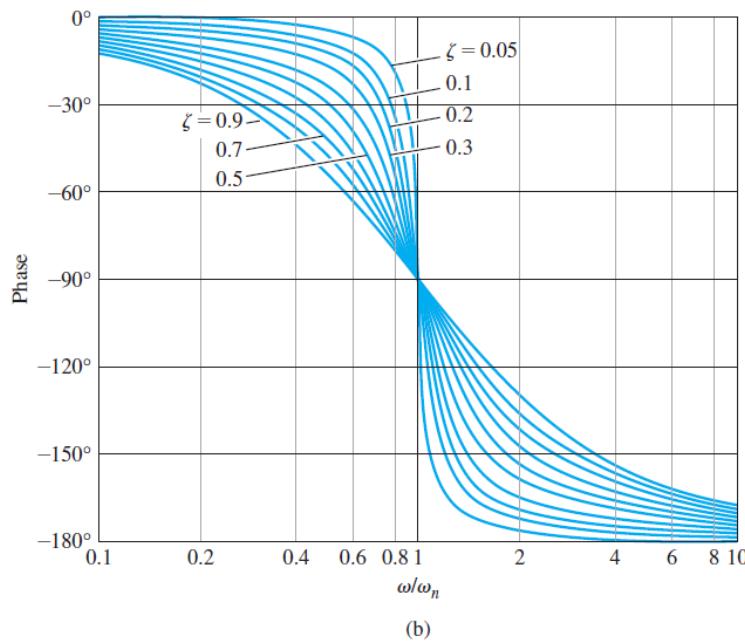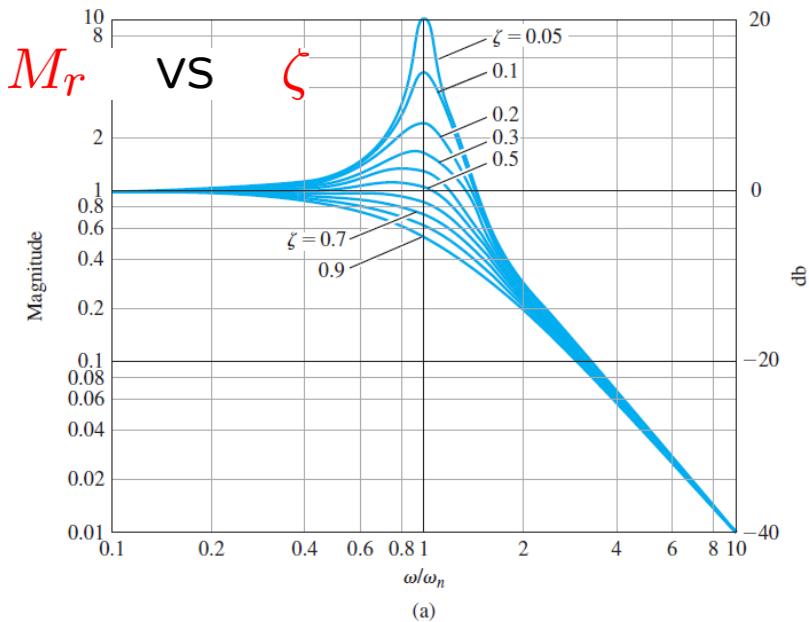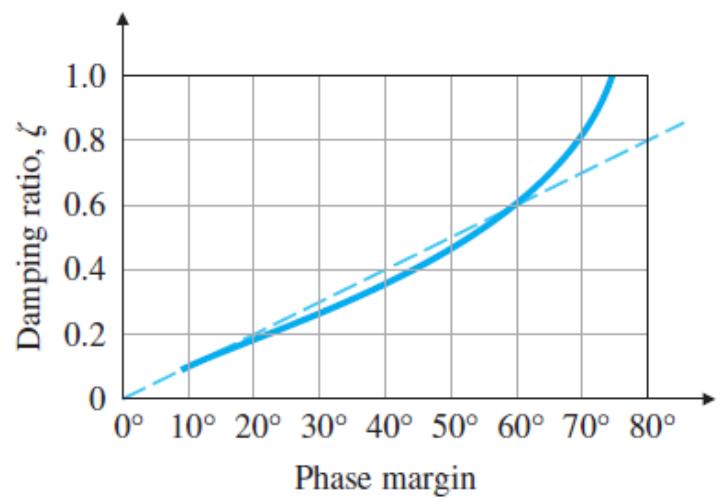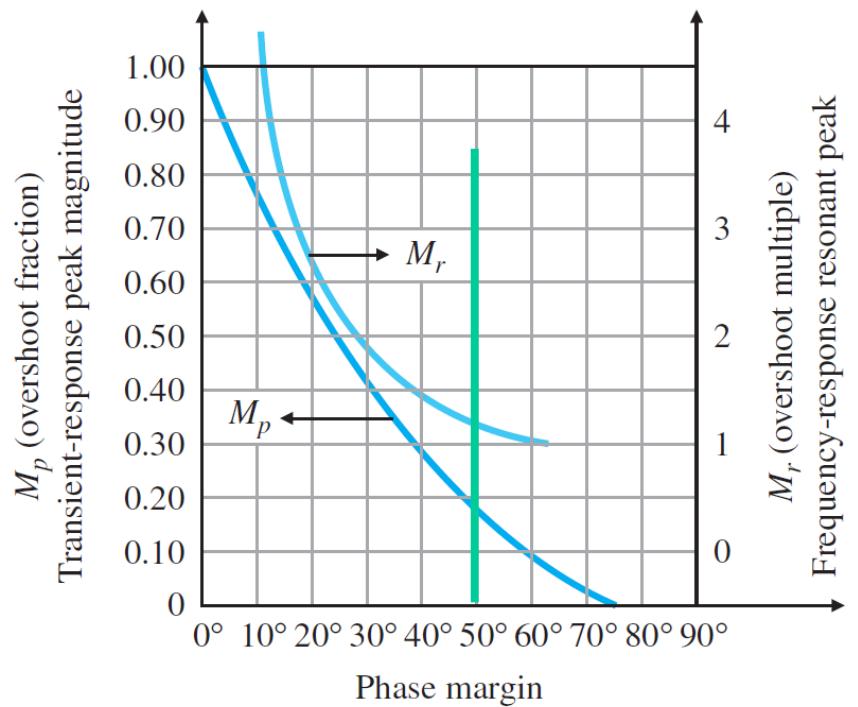

- In some cases,
the PM and GM are not useful indicators of stability.
- For 1st- and 2nd-order systems,
the phase never crosses the 180° line;
- Hence, the GM is always ∞ and not a useful design parameter.
- For higher-order systems,
it is possible to have more than one frequency
where $|KG(jw)| = 1$ or where $\angle KG(jw) = 180^\circ$
- And the margins as previously defined need clarification.
- An example as follows:

- In Chapter 10
- The magnitude **crosses 1 three times**
- Define PM by the **first crossing**
- Because the **PM at this crossing**
was the **smallest** of these 3 values
and thus the **most conservative** assessment of stability

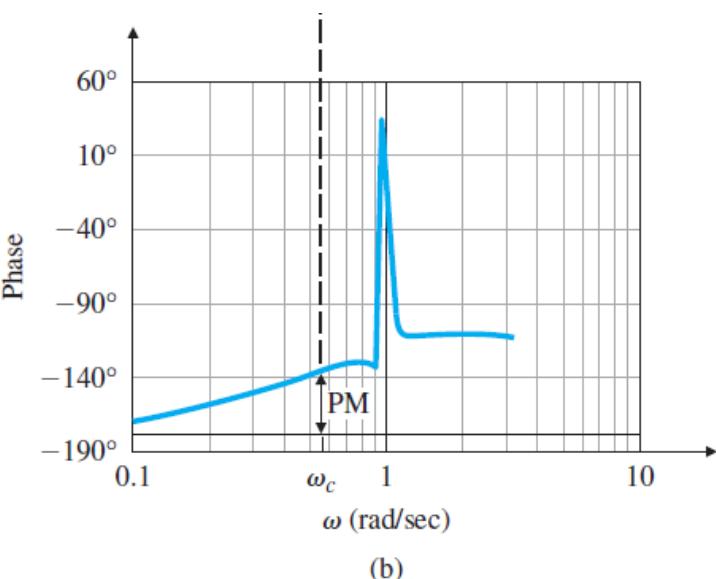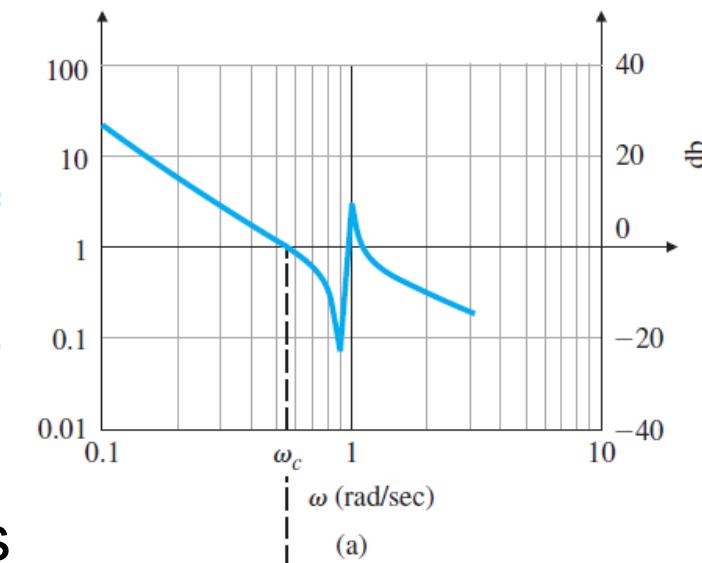

- Vector Margin (or Complex Margin)

- The distance to the **-1** point

from the **closet approach**

of the Nyquist Plot


- Vector margin is

a **single** margin parameter,

- It removes all the **ambiguities**

in assessing stability

that come with **using GM and PM in combination.**

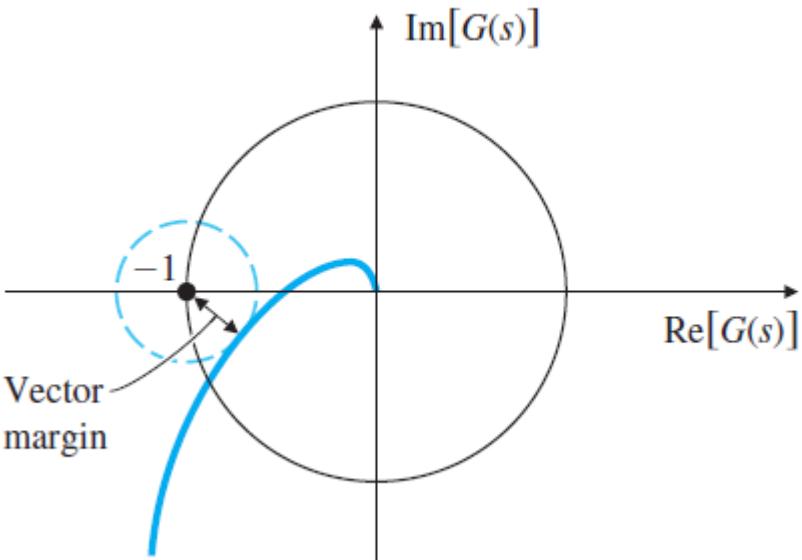

- Conditionally Stable Systems

- Point A:


- Increase gain

→ make **stable**

- Point B:

- Increase/decrease gain


→ make **unstable**

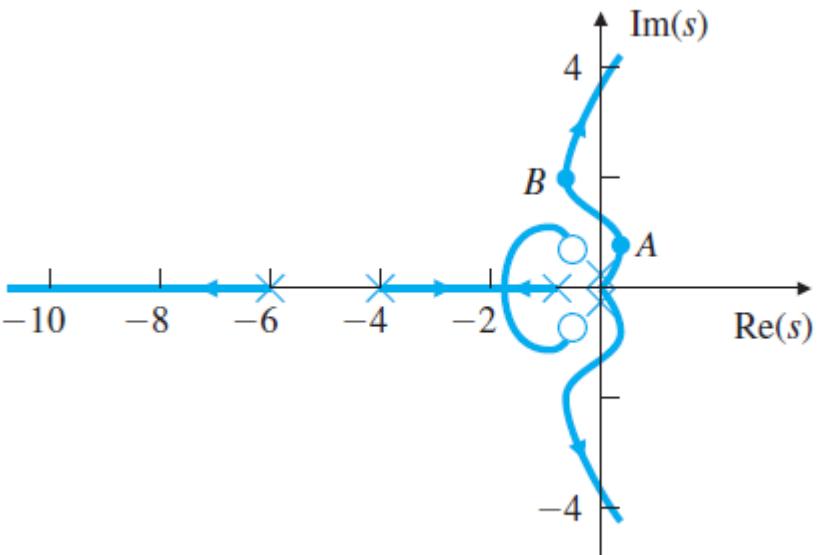


■ Example 6.12: Stability Properties
for a Conditionally Stable System

$$K G(s) = \frac{K (s + 10)^2}{s^3}$$

- Unstable: $K < 5$
- Stable: $K > 5$

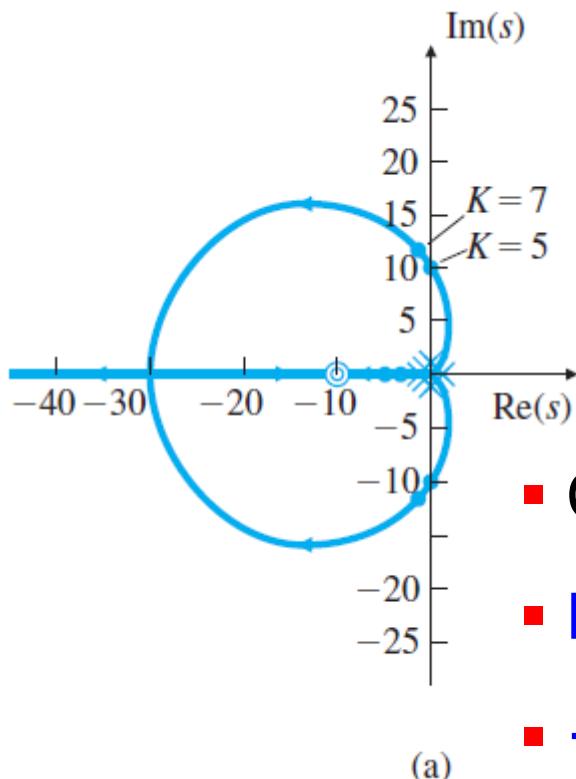

- Counting Nyquist encirclements
- No net encirclements
- → Stable for $K = 7$

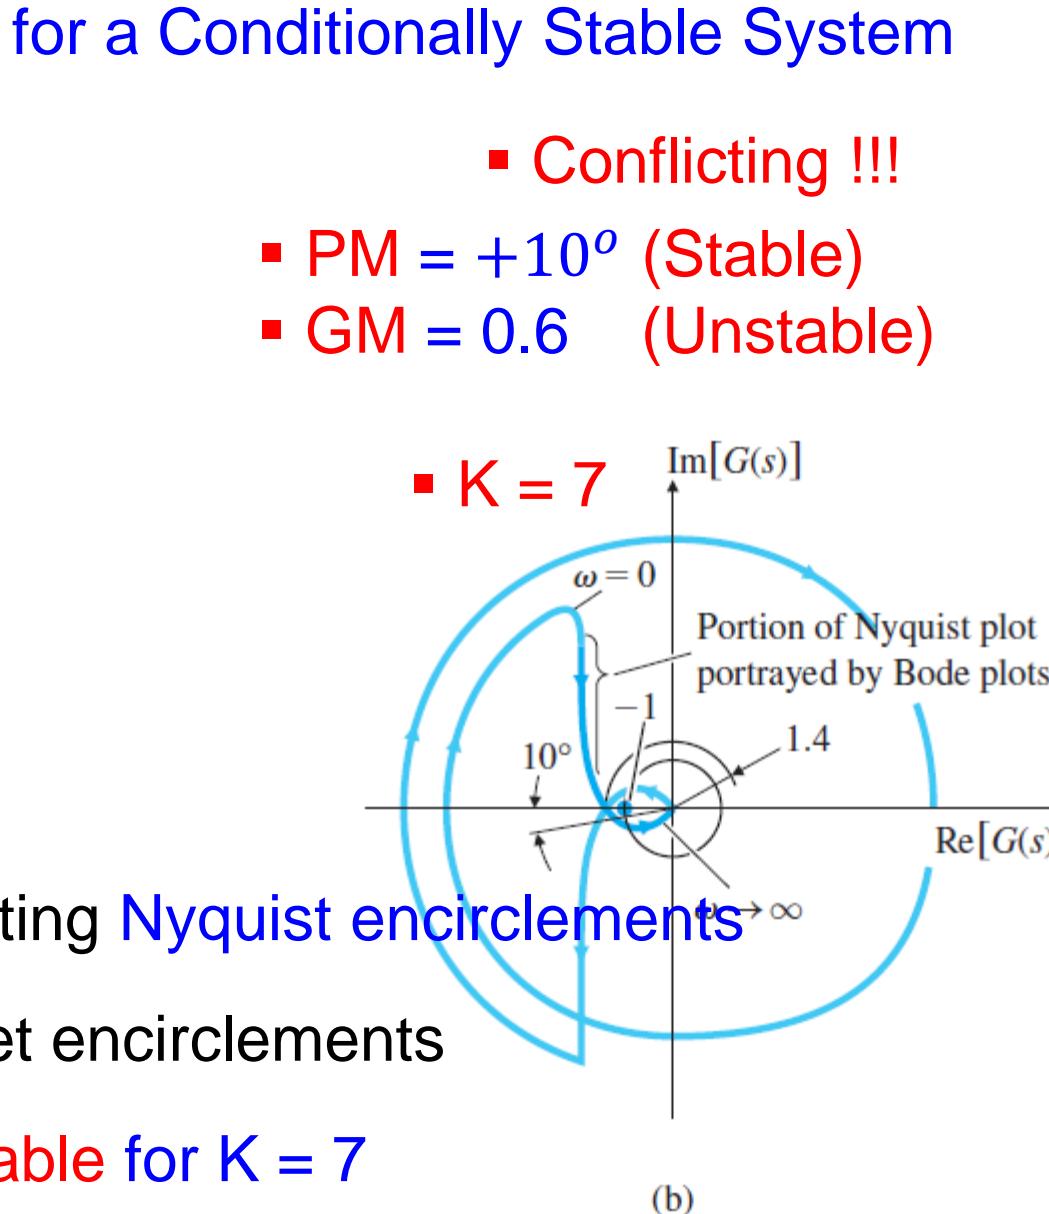


■ Example 6.13: Nyquist Plot for a System
with Multiple Crossover Frequencies

$$G(s) = \frac{85 (s + 1) (s^2 + 2s + 43.25)}{s^2 (s^2 + 2s + 82) (s^2 + 2s + 101)}$$

$$= \frac{85 (s + 1) (s + 1 \pm 6.5j)}{s^2 (s + 1 \pm 9j) (s + 1 \pm 10j)}$$

■ 3 crossover frequencies

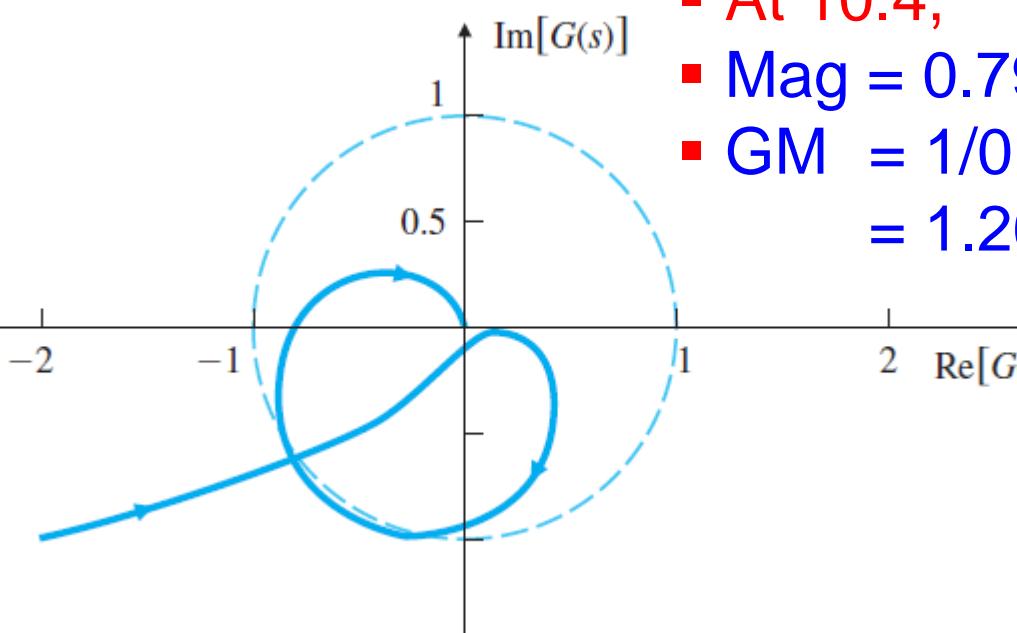

- At 10.4,
- Mag = 0.79
- GM = $1/0.79 = 1.26$

