

Fall 2021 (110-1)

控制系統  
Control Systems

Unit 6K  
PID Compensation

Feng-Li Lian

NTU-EE

Sep 2021 – Jan 2022

## ■ PID Compensation

- Need PM improvement at  $\omega_c$
- Need low-frequency gain improvement


## ■ A common transfer function:

$$D_c(s) = k_P + \frac{k_I}{s} + k_D s$$


$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right]$$

## ■ Roughly equivalent to

combining lead and lag compensations referred to as a **lead-lag compensator**

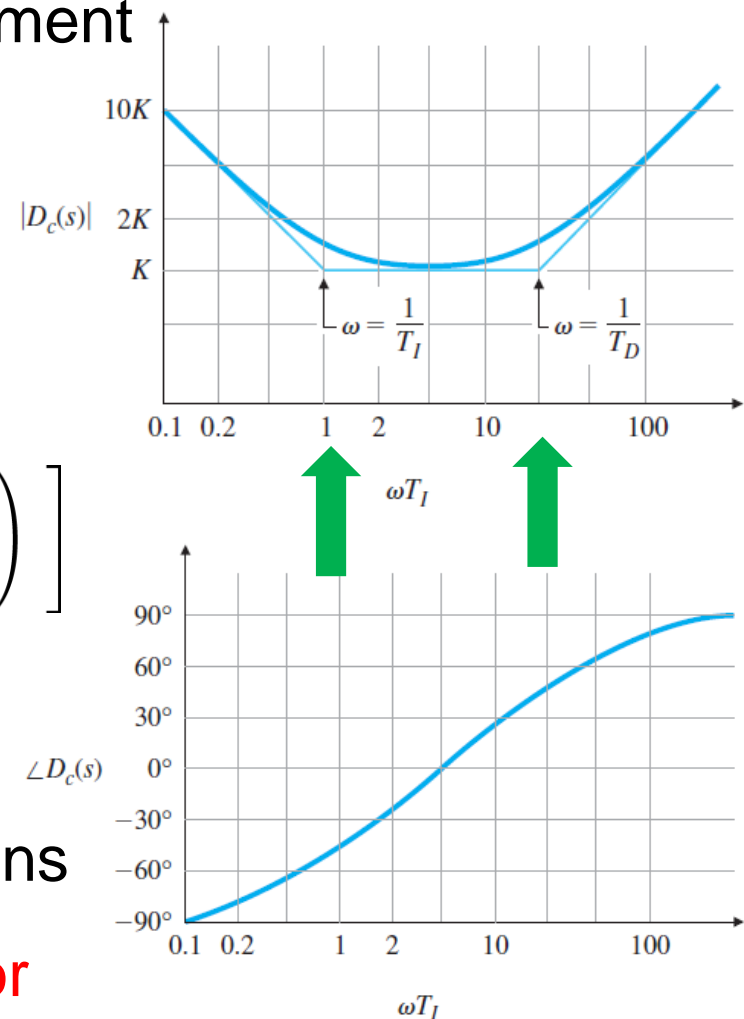

## Example 6.20: PID Compensation for Spacecraft Attitude Control

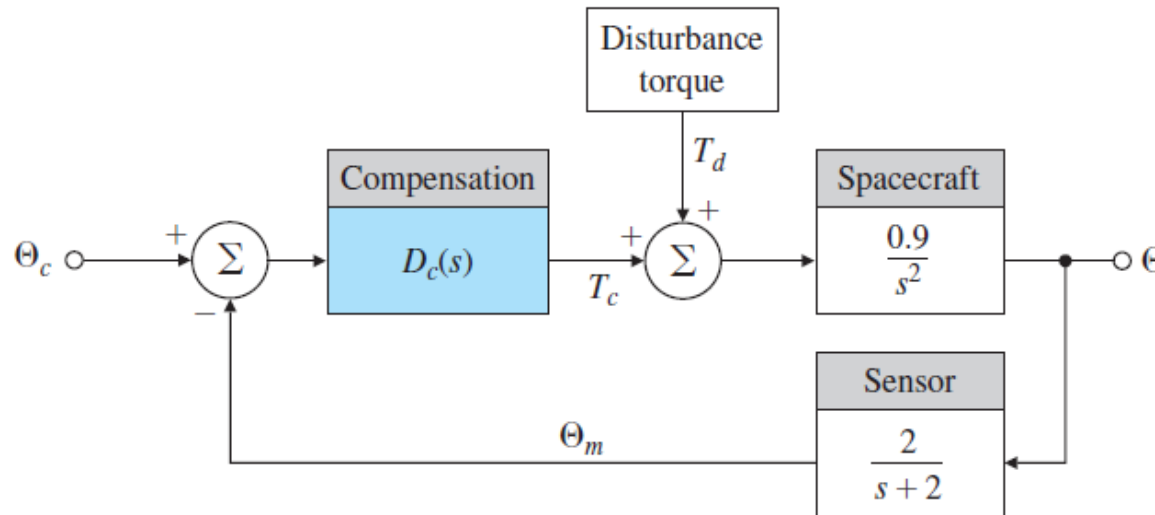

- Design PID controller for:
  - Zero steady-state error
  - $PM = 65^\circ$
  - As high a bandwidth as possible
  - Torque disturbance  $\omega = 0.001$  rad/sec

## Example

- Example 6.20: PID Compensation  
for Spacecraft Attitude Control

- For Final Steady Value


$$\rightarrow T_d + T_c = 0$$

- Therefore, if  $T_d \neq 0$

$$\rightarrow T_c = -T_d$$

- The only way this can be true with no error ( $e = 0$ ) is:


for  $D_c(s)$  to contain an integral term.

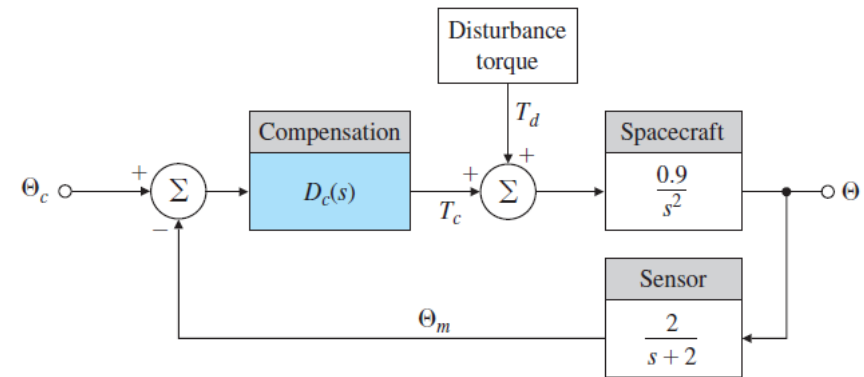

# Example

## Example 6.20: PID Compensation



### for Spacecraft Attitude Control

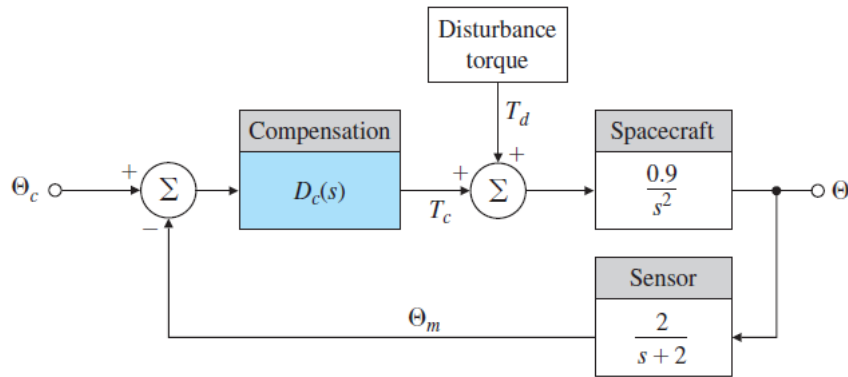

$$G(s) = \frac{0.9}{s^2}$$

$$H(s) = \frac{2}{s+2}$$

- Frequency Response of GH:
- Unstable

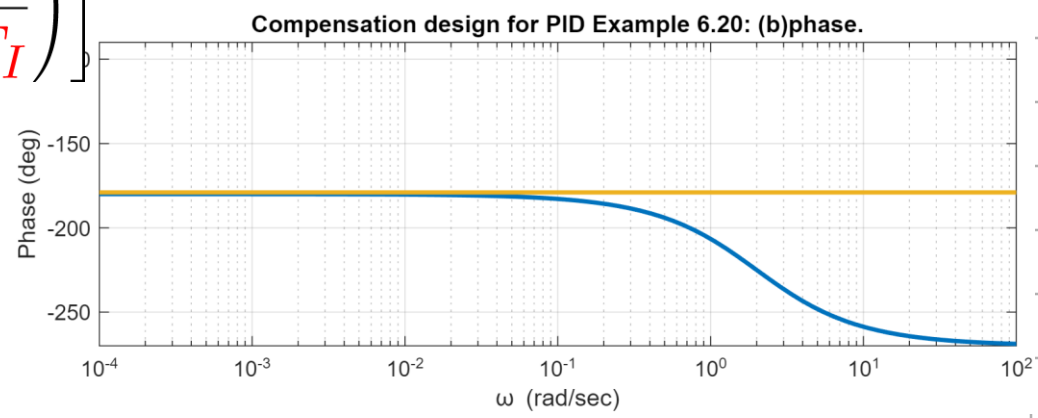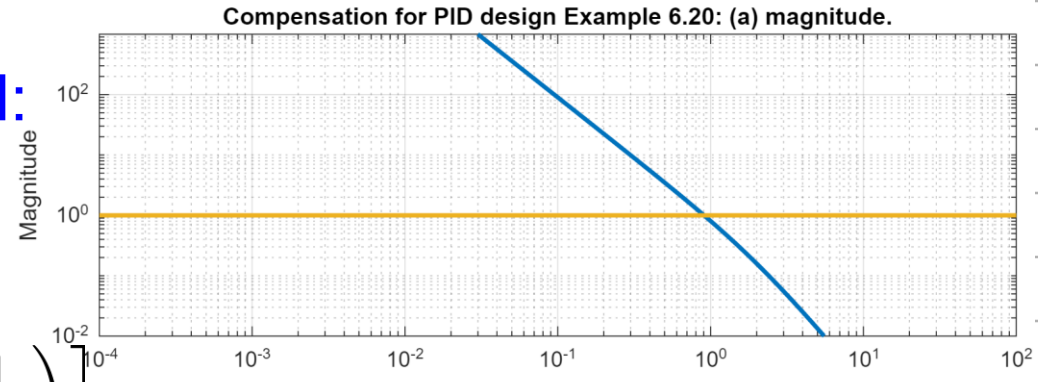

$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right]$$

- Select:  $K$ ,  $T_D$ ,  $T_I$
- PM = 65° at high frequency
  - By adjusting  $T_D$





# Example

## Example 6.20: PID Compensation

$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \text{ for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$

$$H(s) = \frac{2}{s + 2}$$

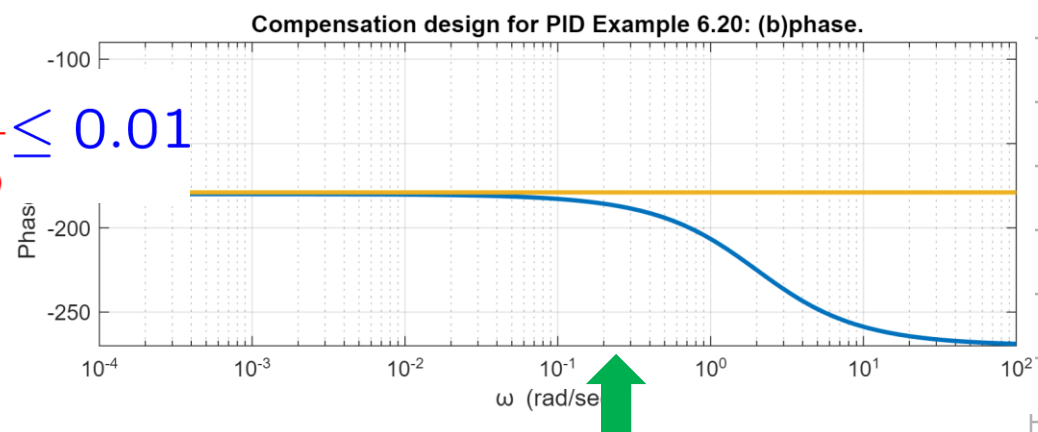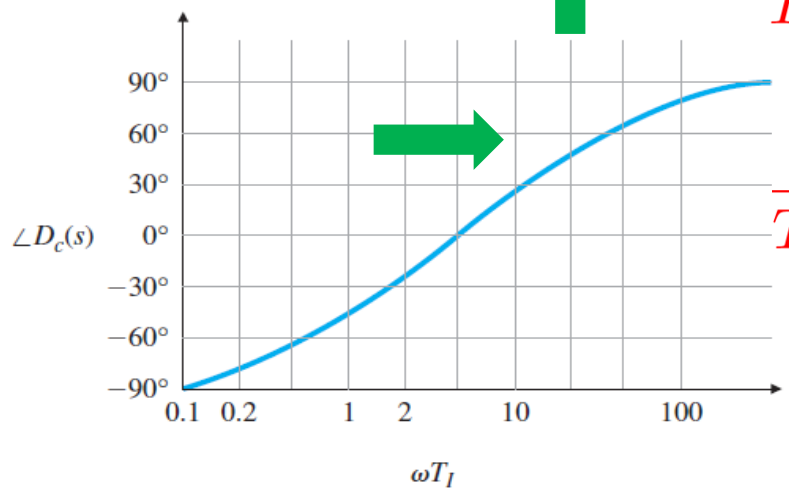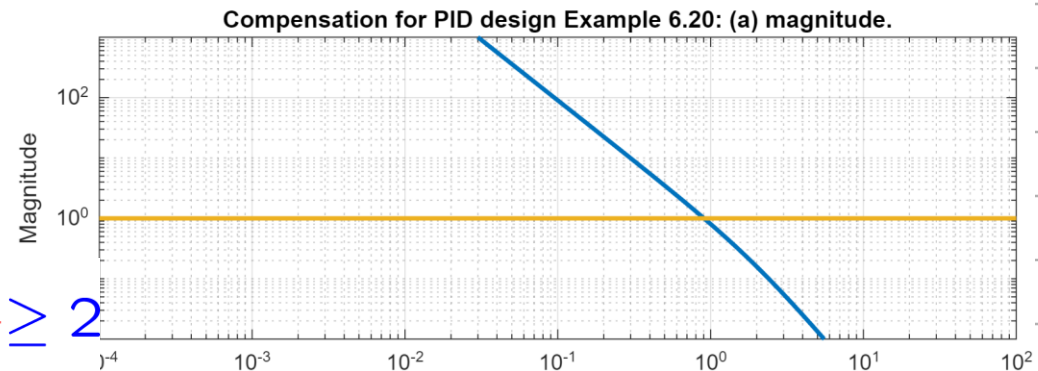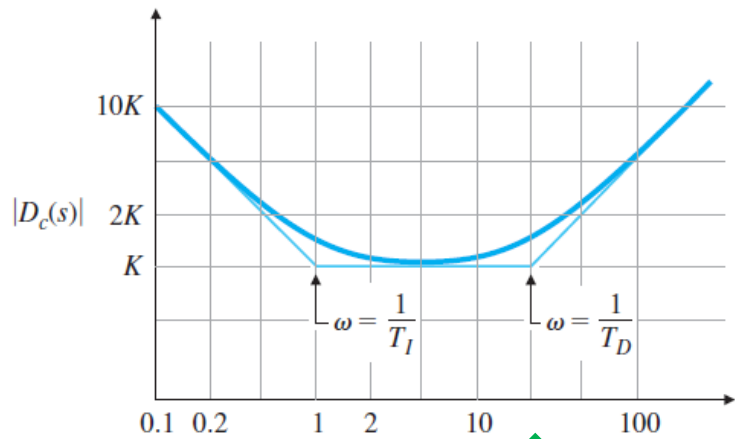

$$\frac{1}{T_D} \geq 2$$

$$\frac{1}{T_D} \leq 0.01$$

# Example

## Example 6.20: PID Compensation



$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \quad \text{for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$


$$H(s) = \frac{2}{s + 2}$$

$$\frac{1}{T_I} = 0.5$$


$$\frac{1}{T_D} = 10$$

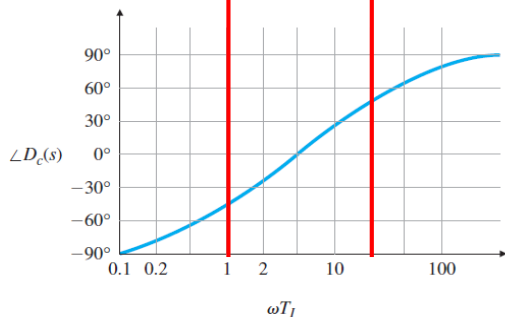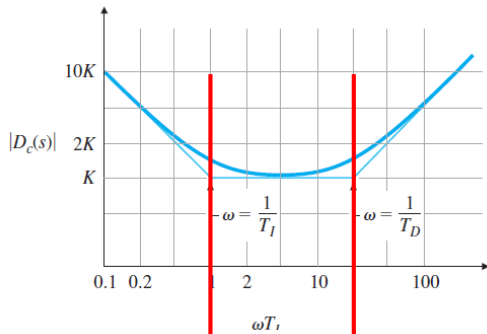

Compensation for PID design Example 6.20: (a) magnitude.

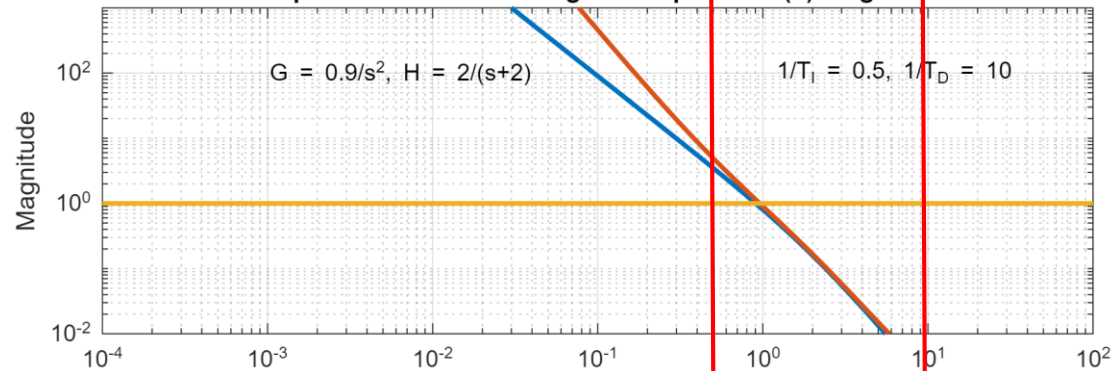

Compensation design for PID Example 6.20: (b) phase

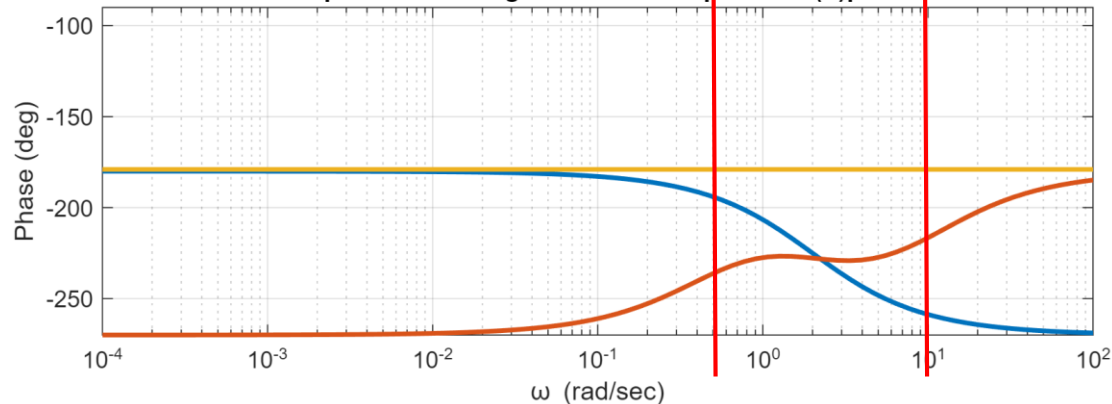

# Example

## Example 6.20: PID Compensation





$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \quad \text{for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$

$$H(s) = \frac{2}{s + 2}$$

$$\frac{1}{T_I} = 0.05$$

$$\frac{1}{T_D} = 1$$

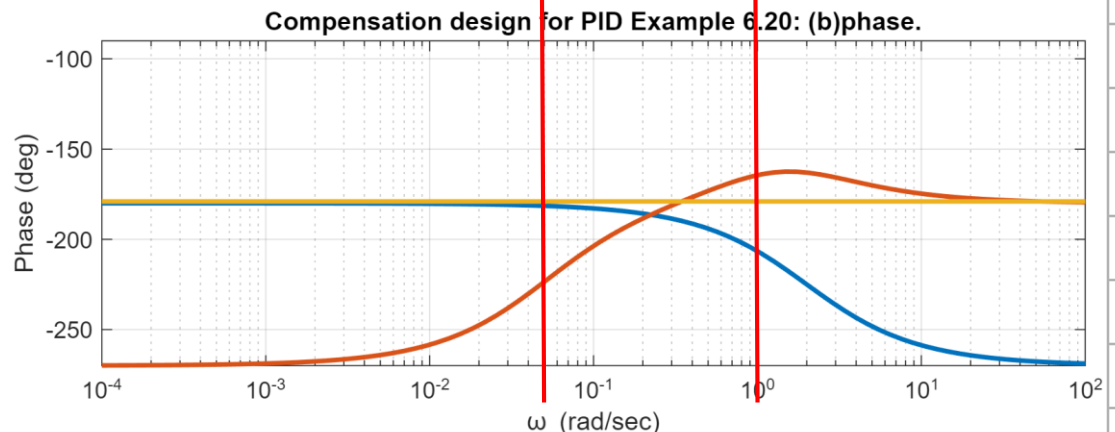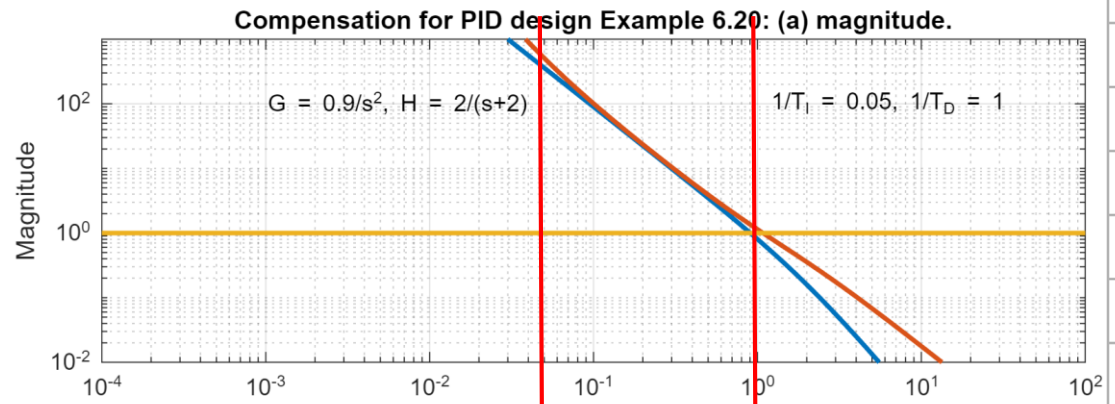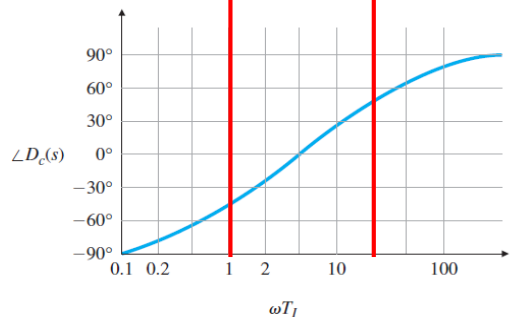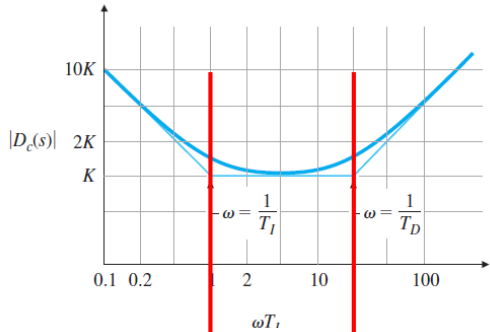



# Example

## Example 6.20: PID Compensation



$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \quad \text{for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$


$$H(s) = \frac{2}{s + 2}$$

$$\frac{1}{T_I} = 0.005$$


$$\frac{1}{T_D} = 0.1$$

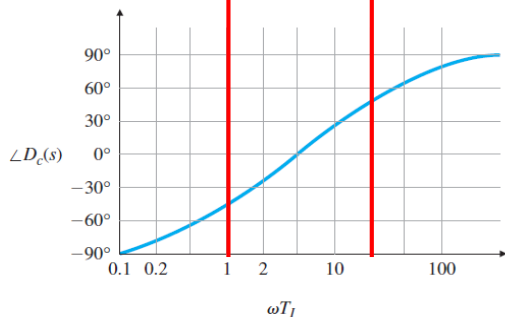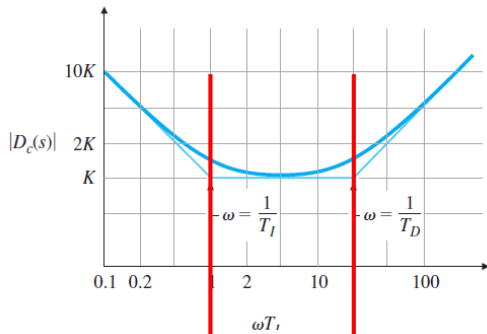

Compensation for PID design Example 6.20: (a) magnitude.

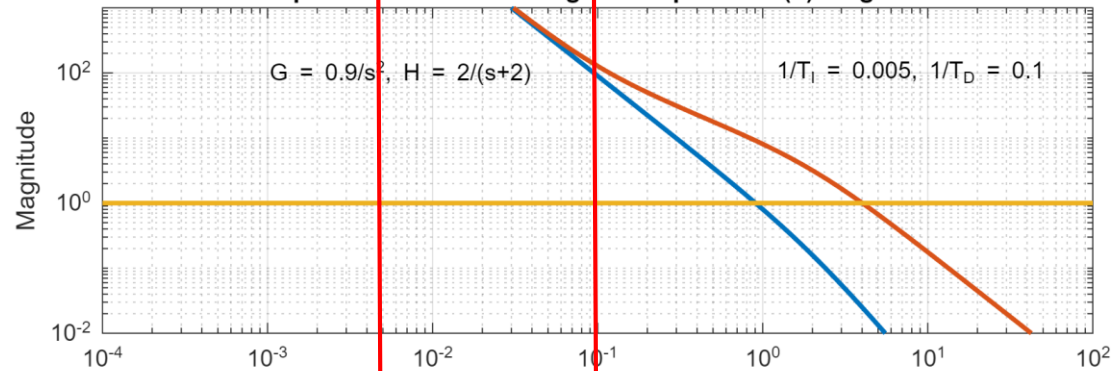

Compensation design for PID Example 6.20: (b) phase.

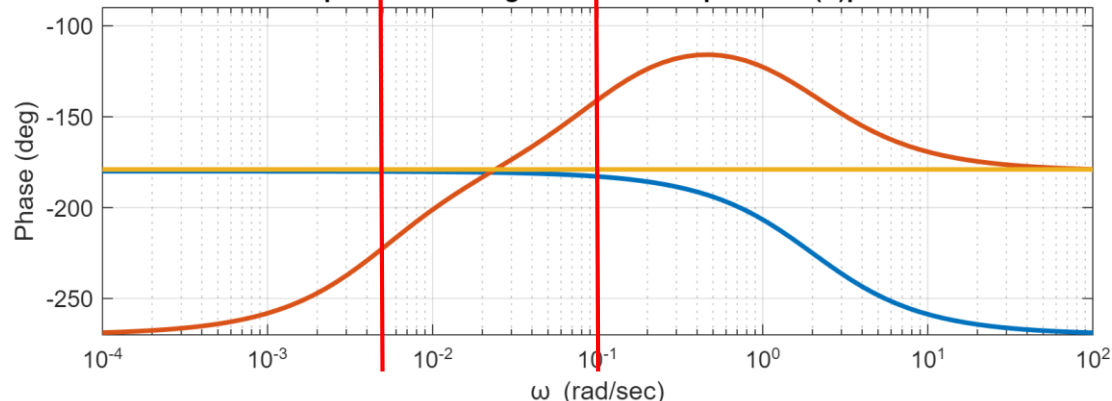

# Example

## Example 6.20: PID Compensation

$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \quad \text{for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$

$$H(s) = \frac{2}{s + 2}$$

$\frac{1}{T_I} = 0.5$	$\frac{1}{T_D} = 10$
$\frac{1}{T_I} = 0.05$	$\frac{1}{T_D} = 1$
$\frac{1}{T_I} = 0.005$	$\frac{1}{T_D} = 0.1$



PM = 65°

→ Find K

| D<sub>c</sub>(s) G(s) | = 20

1/K = 20

K = 0.05

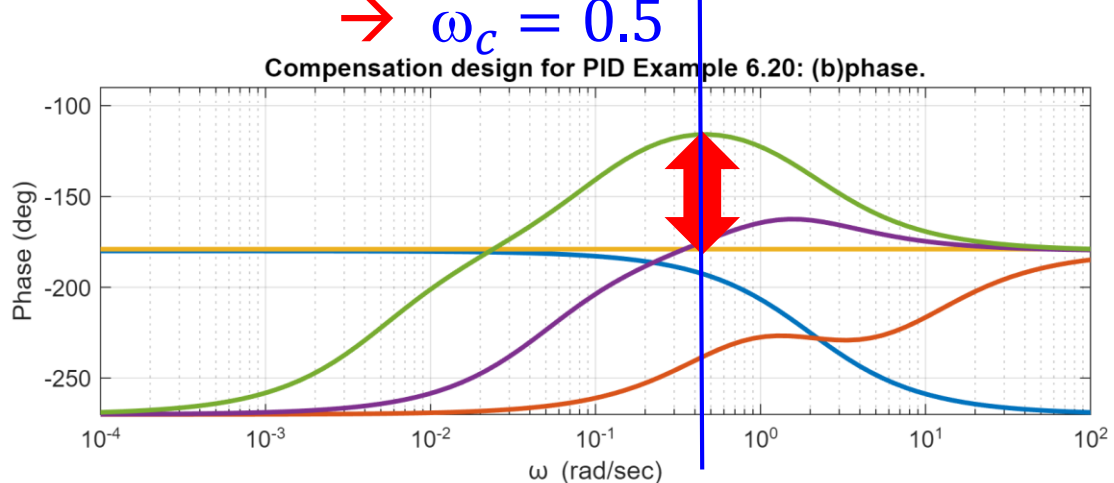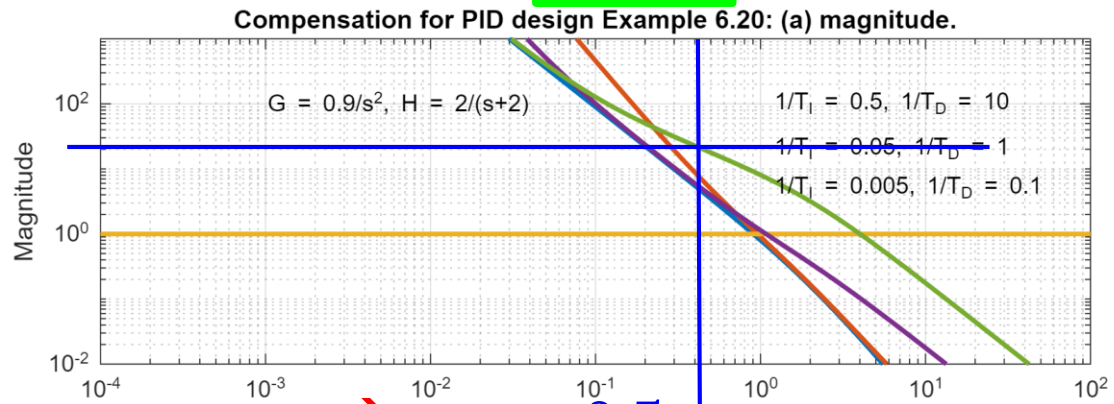

## Example 6.20: PID Compensation


$$D_c(s) = \frac{K}{s} \left[ (T_D s + 1) \left( s + \frac{1}{T_I} \right) \right] \quad \text{for Spacecraft Attitude Control}$$

$$G(s) = \frac{0.9}{s^2}$$


$$H(s) = \frac{2}{s + 2}$$

$$= \frac{0.05}{s} \left[ (10s + 1) \left( s + \frac{1}{0.005} \right) \right]$$

Compensation for PID design Example 6.20: (a) magnitude.

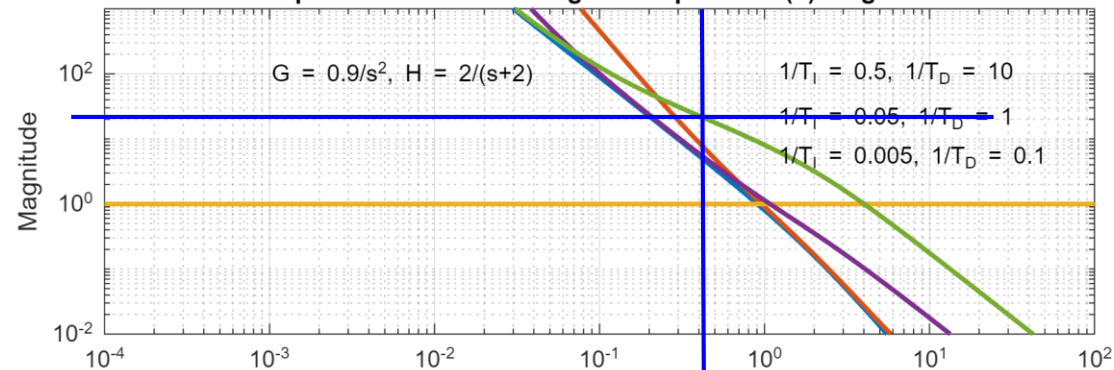


Compensation design for PID Example 6.20: (b) phase.

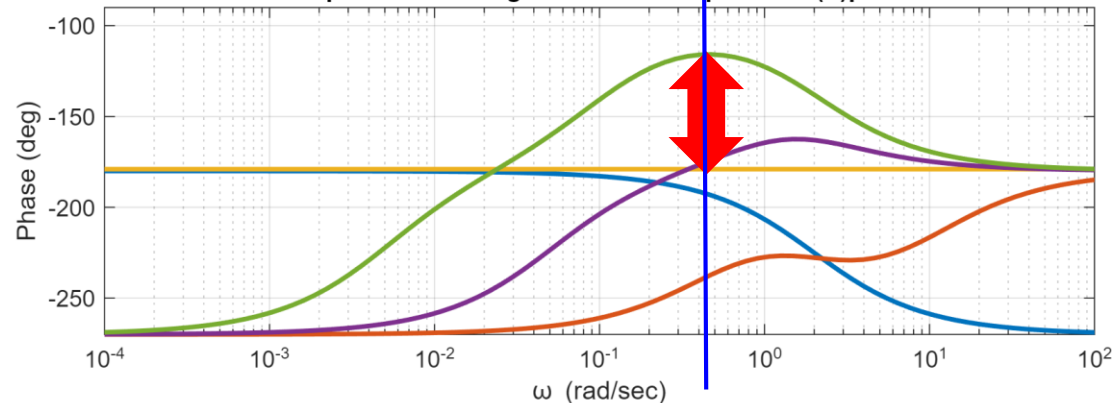

# Example


## Example 6.20: PID Compensation

### for Spacecraft Attitude Control

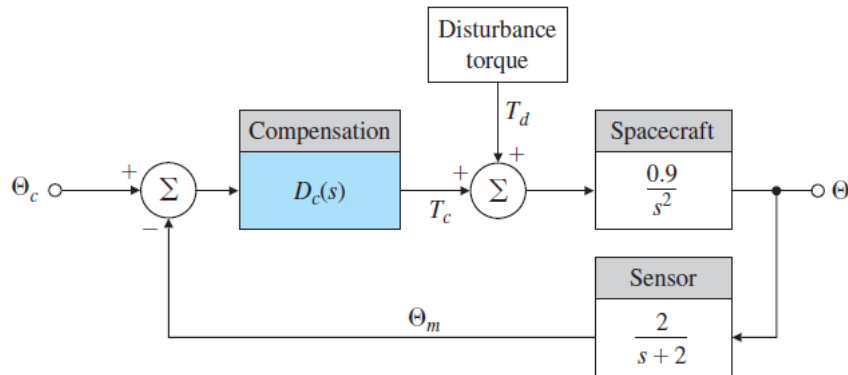


- Response of the system for a **unit step**  $\theta_{com}$  is found from:

$$\mathcal{T}(s) = \frac{\Theta}{\Theta_{com}} = \frac{D_c G}{1 + D_c G H}$$

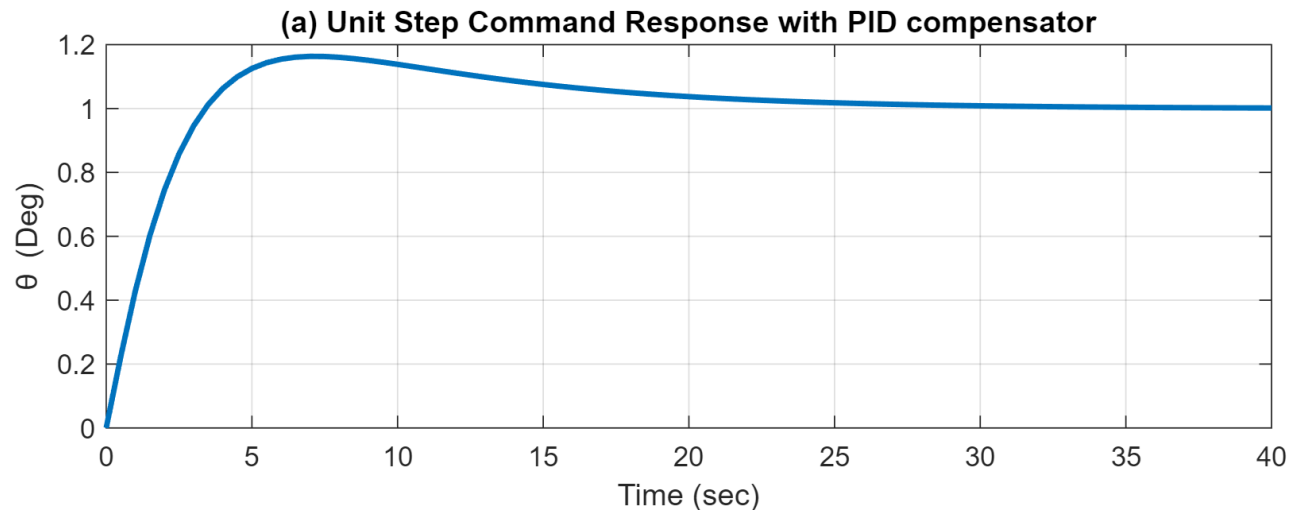


Example 6.20: PID Compensation

for Spacecraft Attitude Control

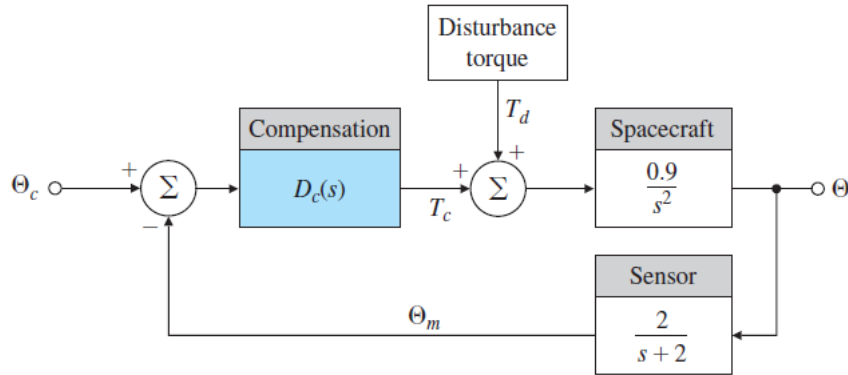


- Response for a step disturbance torque of  $T_d$  is found from:

$$\frac{\Theta}{T_d} = \frac{G}{1 + D_c G H}$$

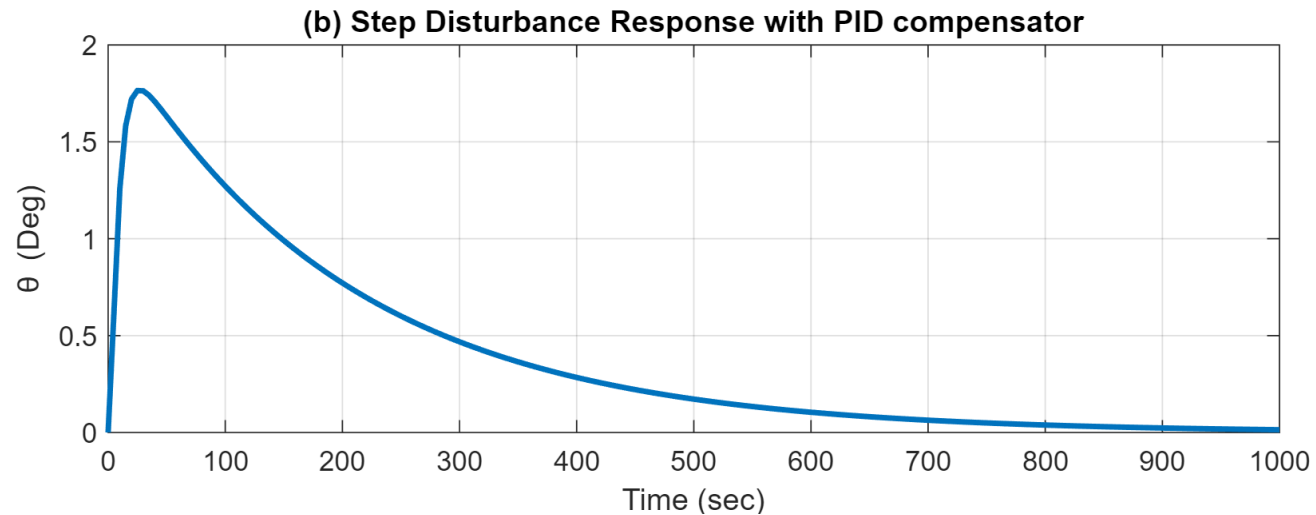

## Example 6.20: PID Compensation

for Spacecraft Attitude Control

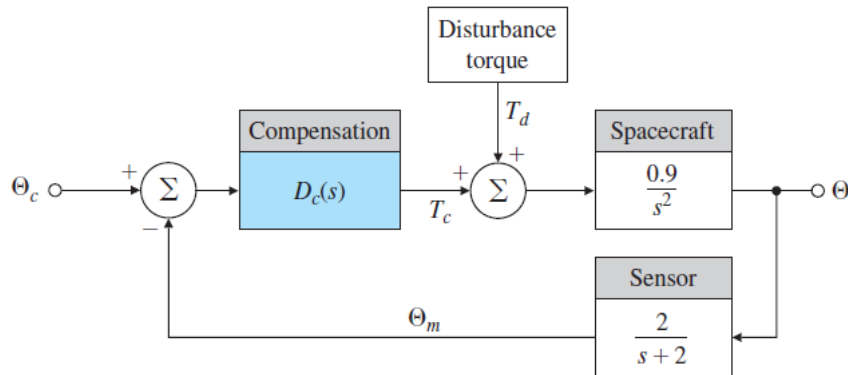

- Frequency Response of  $T(s)$  and  $S(s)$  are shown:

